


ROOF PLAN GENERAL NOTES

- ALL ROOF ASSEMBLIES AND COVERINGS SHALL HAVE B CLASS "A" FIRE CLASSIFICATION TESTED IN ACCORDANCE WITH ASTM E 108 OR UL790 PER 2020 FLORIDA BUILDING CODE (7th EDITION) SECTION 1516.1.
- ALL ROOFING ASSEMBLIES SHALL COMPLY WITH THE PROJECT UPLIFT REQUIREMENTS BASED ON THE WIND VELOCITY PRESSURES FOR THE PROJECT. SEE STRUCT. DWGS.
- ALL ROOF INSULATION SHALL HAVE A PRODUCT APPROVAL RATING AND / OR VALID MIAMI-DADE NOA AS AN APPROVED ROOFING COMPONENT FOR USE IN ROOFING ASSEMBLIES AND SHALL BE TESTED IN ACCORDANCE WITH TAS 110.
- ALL WOOD BLOCKING SHALL BE PRESSURE TREATED.
- PROVIDE CONTINUOUS FLASHING & COUNTER FLASHING AT ALL ROOF TO WALL CONDITIONS.
- REFER TO ROOFING MANUFACTURER'S REQUIREMENTS FOR FLASHING, BASE TIE-INS AND SEALANT BEADS AND APPLICABLE NRCA & SMACNA GUIDELINES.
- REFER TO PLUMBING DRAWINGS FOR ROOF DRAIN SIZING AND DISCHARGE PER 2020 FLORIDA BUILDING CODE (7th EDITION) SECTION 1514.4.3.
- CONTRACTOR TO SUBMIT MIAMI-DADE COUNTY CERTIFICATE OF PRODUCT CONTROL APPROVAL FOR ARCHITECT'S/ ENGINEER'S REVIEW.

ROOF DESCRPTION


SHINGLE ROOF ON HOT MOPPED 90# FIBERGLASS PAPER, OVER 90# ASPHALT PAPER FASTENED TO MECHANICAL FASTNER SCHEDULE, OVER $\frac{3}{32}$ " CDX PLAYWOOD FASTNENED TO WOOD TRUSSES W/ 8D NAILS 6" O.C. INTERMEDIATE SUPPORT @ 4" O.C. @ EAVES AND PANEL EDGES.

MECHANICAL FASTENERS AND TIN CAPS SHALL BE SPACE IN A MINIMUM PATTERN OF 12" O.C. ON A 4" OVERLAP AND 18" O.C. IN TWO STAGGERED ROWS IN THE FIELD AREA OF THE ROOF. PERIMETER AREAS SHALL BE FASTENED 9" IN THE LAP AND 12" IN THE FIELD.

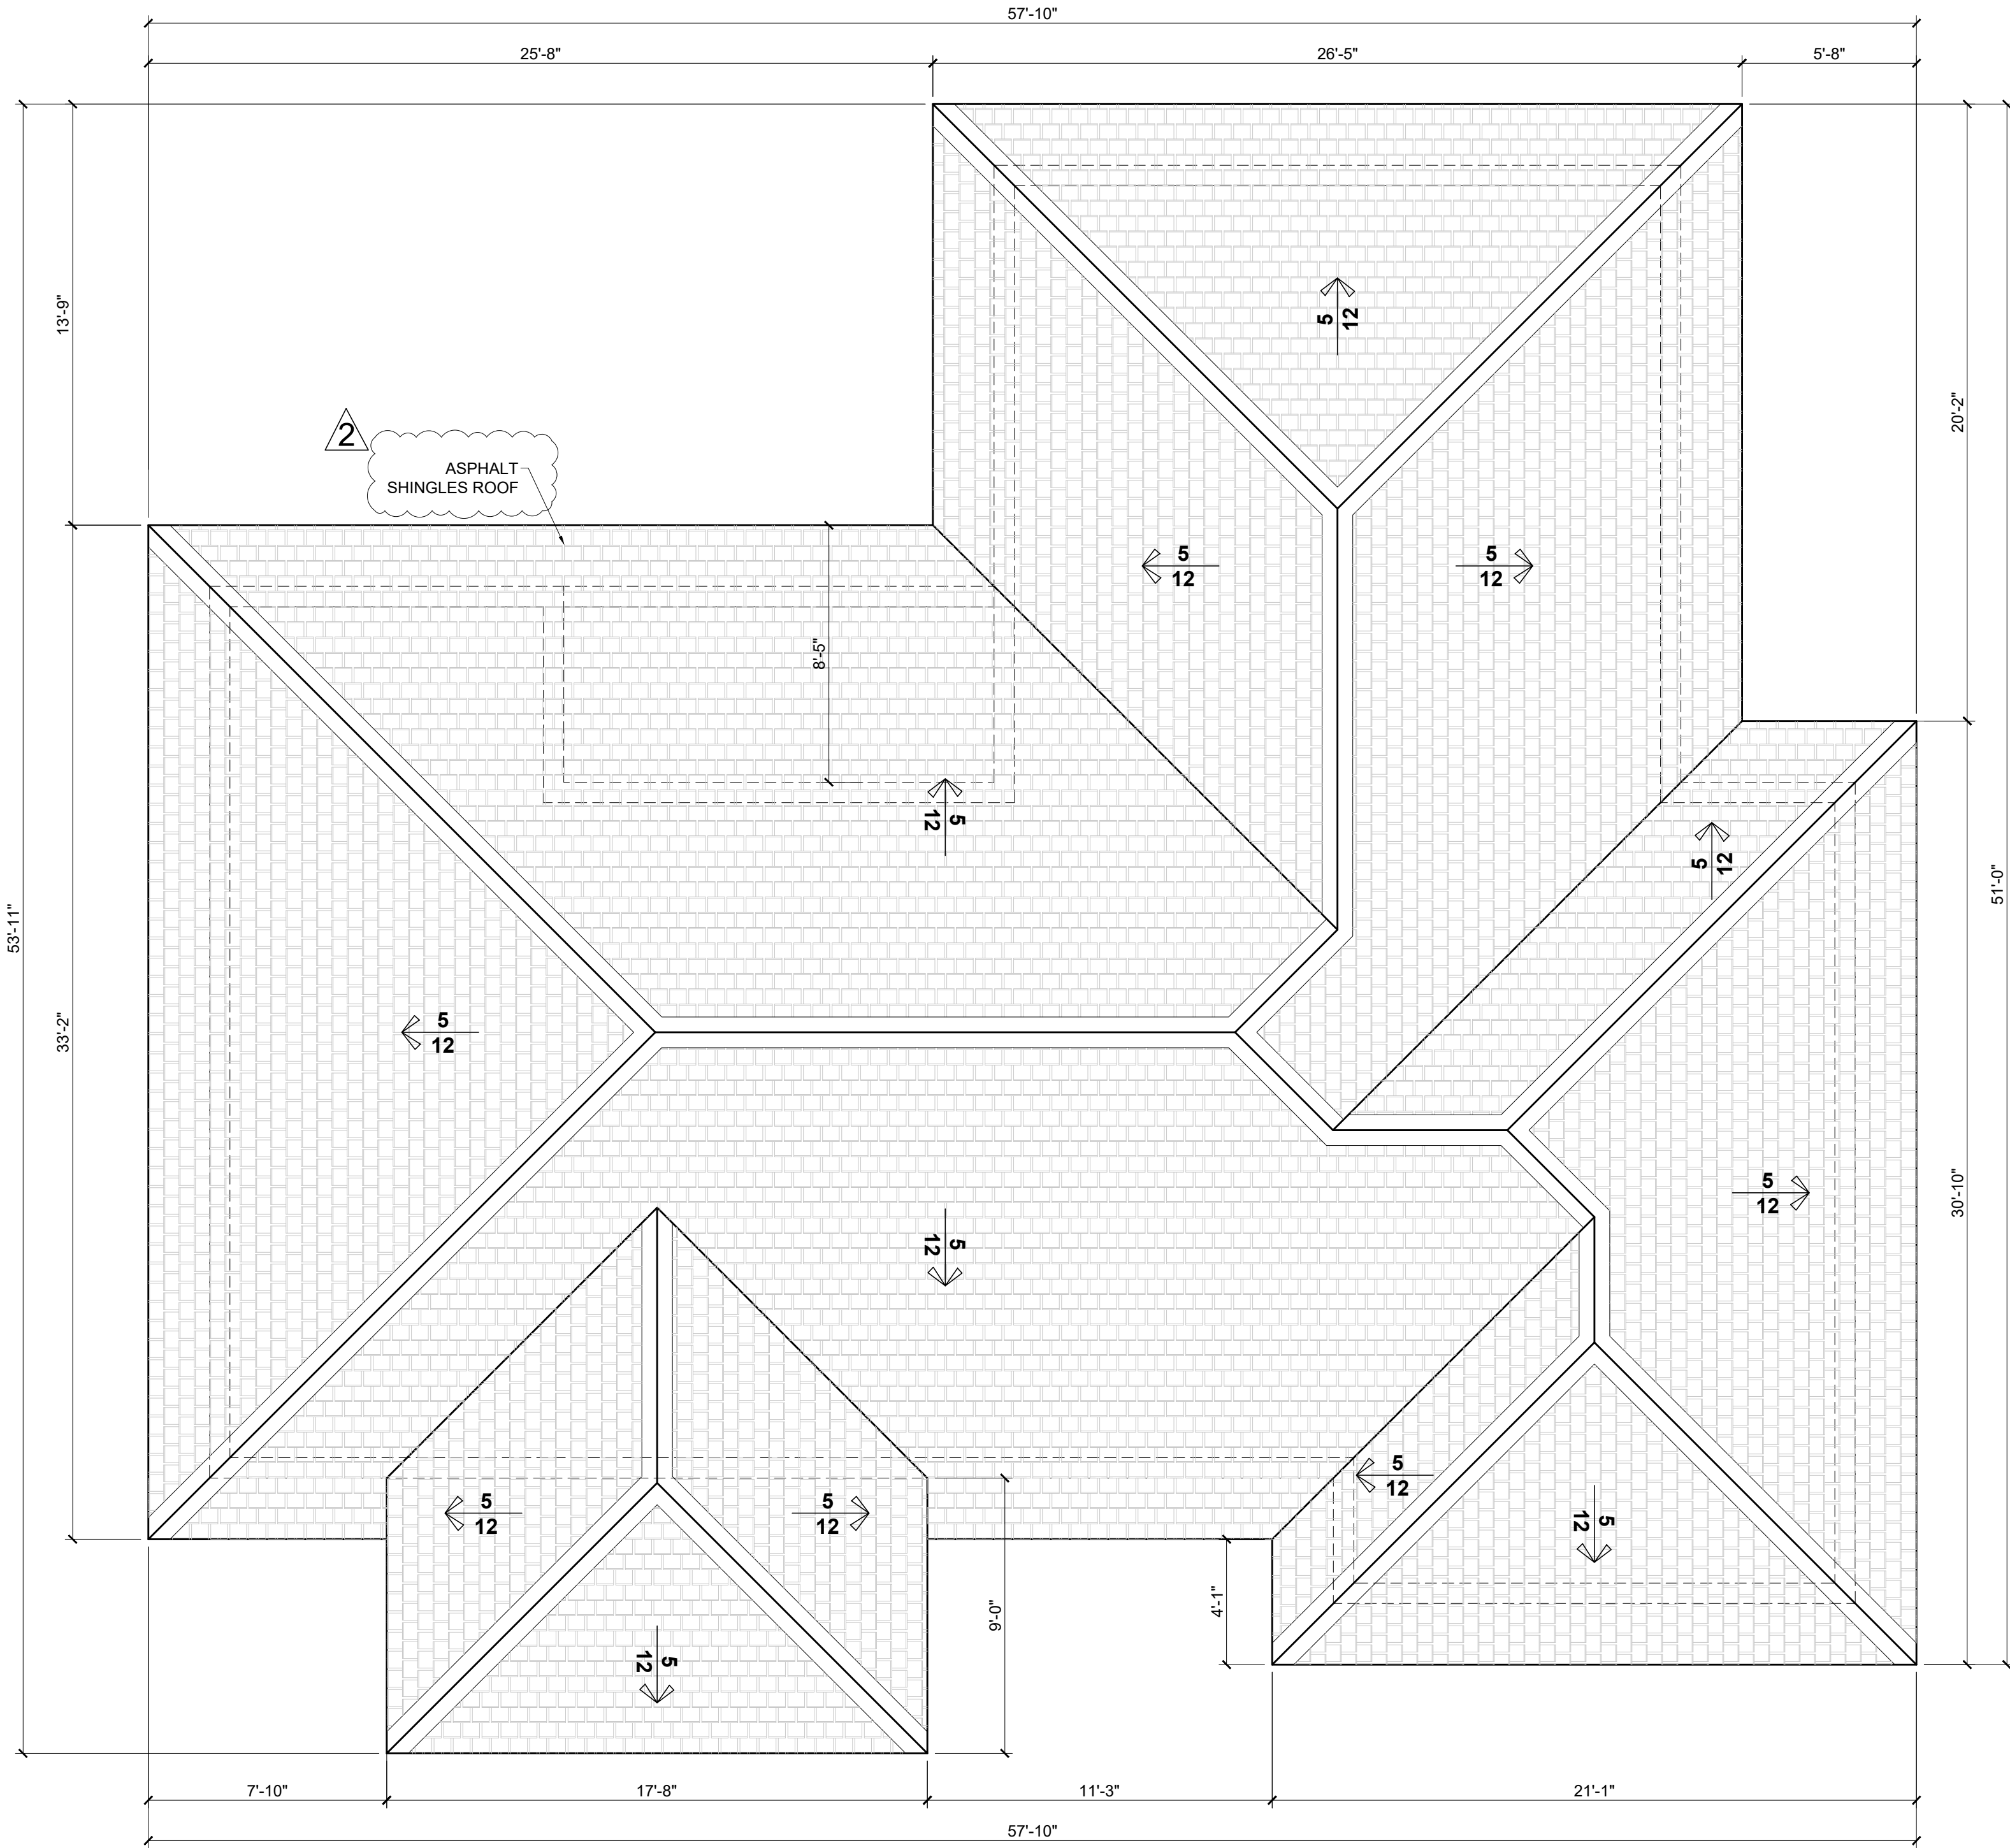

ROOF PLAN

SCALE: 1/4" = 1'-0"



1701 PONCE DE LEON | SUITE 201
CORAL GABLES, FLORIDA 33134
o - 305.284.7325
e - ra@realizationarchitects.com
w - www.realizationarchitects.com

CLIENT / PROJECT:

JUAN ROSELLO
5125 SW 98 CT
MIAMI, FL 33165

CONSULTANTS:

ATRIUM
CONSULTING ENGINEERS
390 W 33RD ST.
HIALEAH, FL 33012
ATRIUM.INFO@ATRIUMENGINEERS.COM
786.991.7299

REVISIONS

2 DESIGN REVISION 09.26.23

DATE: 03.16.23

DRAWINGS AND SPECIFICATIONS AS INSTRUMENTS OF PROFESSIONAL SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF REALIZATION ARCHITECTS LLC. THESE DOCUMENTS ARE NOT TO BE USED, IN WHOLE OR IN PART, FOR ANY OTHER PROJECTS OR PURPOSES, OR BY ANY OTHER PARTIES, THAN THOSE PROPERLY AUTHORIZED BY CONTRACT, WITHOUT THE SPECIFIC WRITTEN AUTHORIZATION OF REALIZATION ARCHITECTS LLC.

RAFAEL TAPANES AR 97896

DISCIPLINE / SHEET TITLE:

PROPOSED ROOF PLAN

SCALE: AS SHOWN

SHEET NO:

A-104