

SYMBOLS LEGEND

/////

EXISTING TO REMAIN

EXISTING TO BE DEMOLISHED

E

EXISTING DOOR TO REMAIN

DEMOLITION NOTES

01 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL LABOR, EQUIPMENT & SERVICES TO PROPERLY EXECUTE THE DEMOLITION AND REMOVAL WORK INDICATED ON THESE PLANS.

02 - THE CONTRACTOR SHALL VISIT THE SITE AND INSPECT THE ENTIRE EXISTING SPACE AND VERIFY THAT ALL ITEMS INDICATED TO BE EXISTING AND SO MARKED ON DRAWINGS ARE IN PLACE AND CORRECT.

03 - ALL DEMOLITION WORK SHALL BE PERFORMED WITH MINIMUM DAMAGE TO THE EXISTING AREAS TO REMAIN. THE CONTRACTOR SHALL UTILIZE THE UTMOST CARE WHEN PERFORMING THE DEMOLITION WORK. CONTRACTOR SHALL PROVIDE BARRICADES WHERE REQUIRED TO PROTECT PUBLIC AND TENANTS.

04 - PROVISIONS SHALL BE MADE TO ALLEVIATE THE SPREAD OF DEBRIS, DIRT AND DUST TO THE ADJACENT TENANTS. THE PROPERTY SHALL BE KEPT AS CLEAN AS POSSIBLE AT ALL TIMES. ANY ASBESTOS REMOVAL SHALL BE DON PRIOR TO ANY DEMOLITION WORK, THIS WORK SHALL BE DONE BY A LICENSED ABATEMENT COMPANY.

05 - ALL DEBRIS AND MATERIALS FROM THE BUILDING SHALL BE DISPOSED OF OFF SITE IN A LEGAL MANNER. NO RECLAIMED LUMBER OR MATERIALS SHALL BE RE-USED EXCEPT AS SPECIFICALLY APPROVED BY ARCHITECT AND OWNER IN WRITTEN FORM.

06 - WHERE DEMOLITION AND CUTTING WORK HAS OCCURRED OR WHERE EXISTING SURFACES, MATERIALS OR OTHER ITEMS HAVE BEEN DAMAGED OR DISTURBED AS A RESULT OF THIS CONTRACT, THE SAID SURFACES AND AREAS SHALL BE CAREFULLY CLOSED UP, PATCHED AND FINISHED AND/OR RESTORED AS REQUIRED TO BE CONTIGUOUS TO EXISTING SURROUNDING SURFACES.

07 - DO NOT REMOVE ANY STRUCTURAL COLUMNS AND/OR BEARING WALLS/PARTITIONS. CONTRACTOR SHALL CAREFULLY REMOVE INTERIOR PARTITIONS AS INDICATED ON PLANS. IF THERE IS ANY CONCERN WHETHER AN INTERIOR WALL IS BEARING OR NOT, CONTRACTOR SHALL CONTACT THE ARCHITECT IMMEDIATELY TO SCHEDULE A VERIFICATION MEETING PRIOR TO REMOVAL.

08 - WHERE PLUMBING NEEDS TO BE ABANDONED, CONTRACTOR SHALL REMOVE ALL VENT STACK PIPE CAP AND WALL PENETRATION. REMOVE ALL OVERHEAD WATER LINES CAP BACK AT SOURCE. ABANDONED UNDERGROUND SANITARY, GREAT OR WATER LINES SHALL BE HARD CAPPED-OFF BELOW SLAB. MAKE SURE ALL WATER HAS BEEN TURNED OFF PRIOR TO ANY WORK. ALL WORK SHALL BE DONE BY A LICENSED AND INSURED PLUMBING CONTRACTOR.

09 - WHERE ELECTRICAL NEEDS TO BE ABANDONED, REMOVE WIRE FROM OUTLET ALL THE WAY BACK TO THE ELECTRICAL PANEL SOURCE. ALL WORK SHALL BE DONE BY LICENSED AND INSURED ELECTRICAL CONTRACTOR.

DEMO KEYNOTE LEGEND - ELEVATIONS

01

EXISTING MASONRY WALL TO REMAIN. EXTERIOR SIDE SHALL BE PATCHED, REPAIRED AND PREPARED READY TO RECEIVE PAINT FINISHES AS REQUIRED.

02

EXISTING ROOF TO BE REMOVED.

03

EXISTING WINDOW TO BE REMOVED.

04

EXISTING DOOR TO BE REMOVED.

05

EXISTING WALL TO BE REMOVED.

06

WALL TO BE FILLED.

07

PARTIAL WALL TO REMAIN.

08






LOW WALL TO BE REMOVED.

09

EXISTING FOUNDATION TO REMAIN.

10

LOW PLANTER TO BE REMOVED.

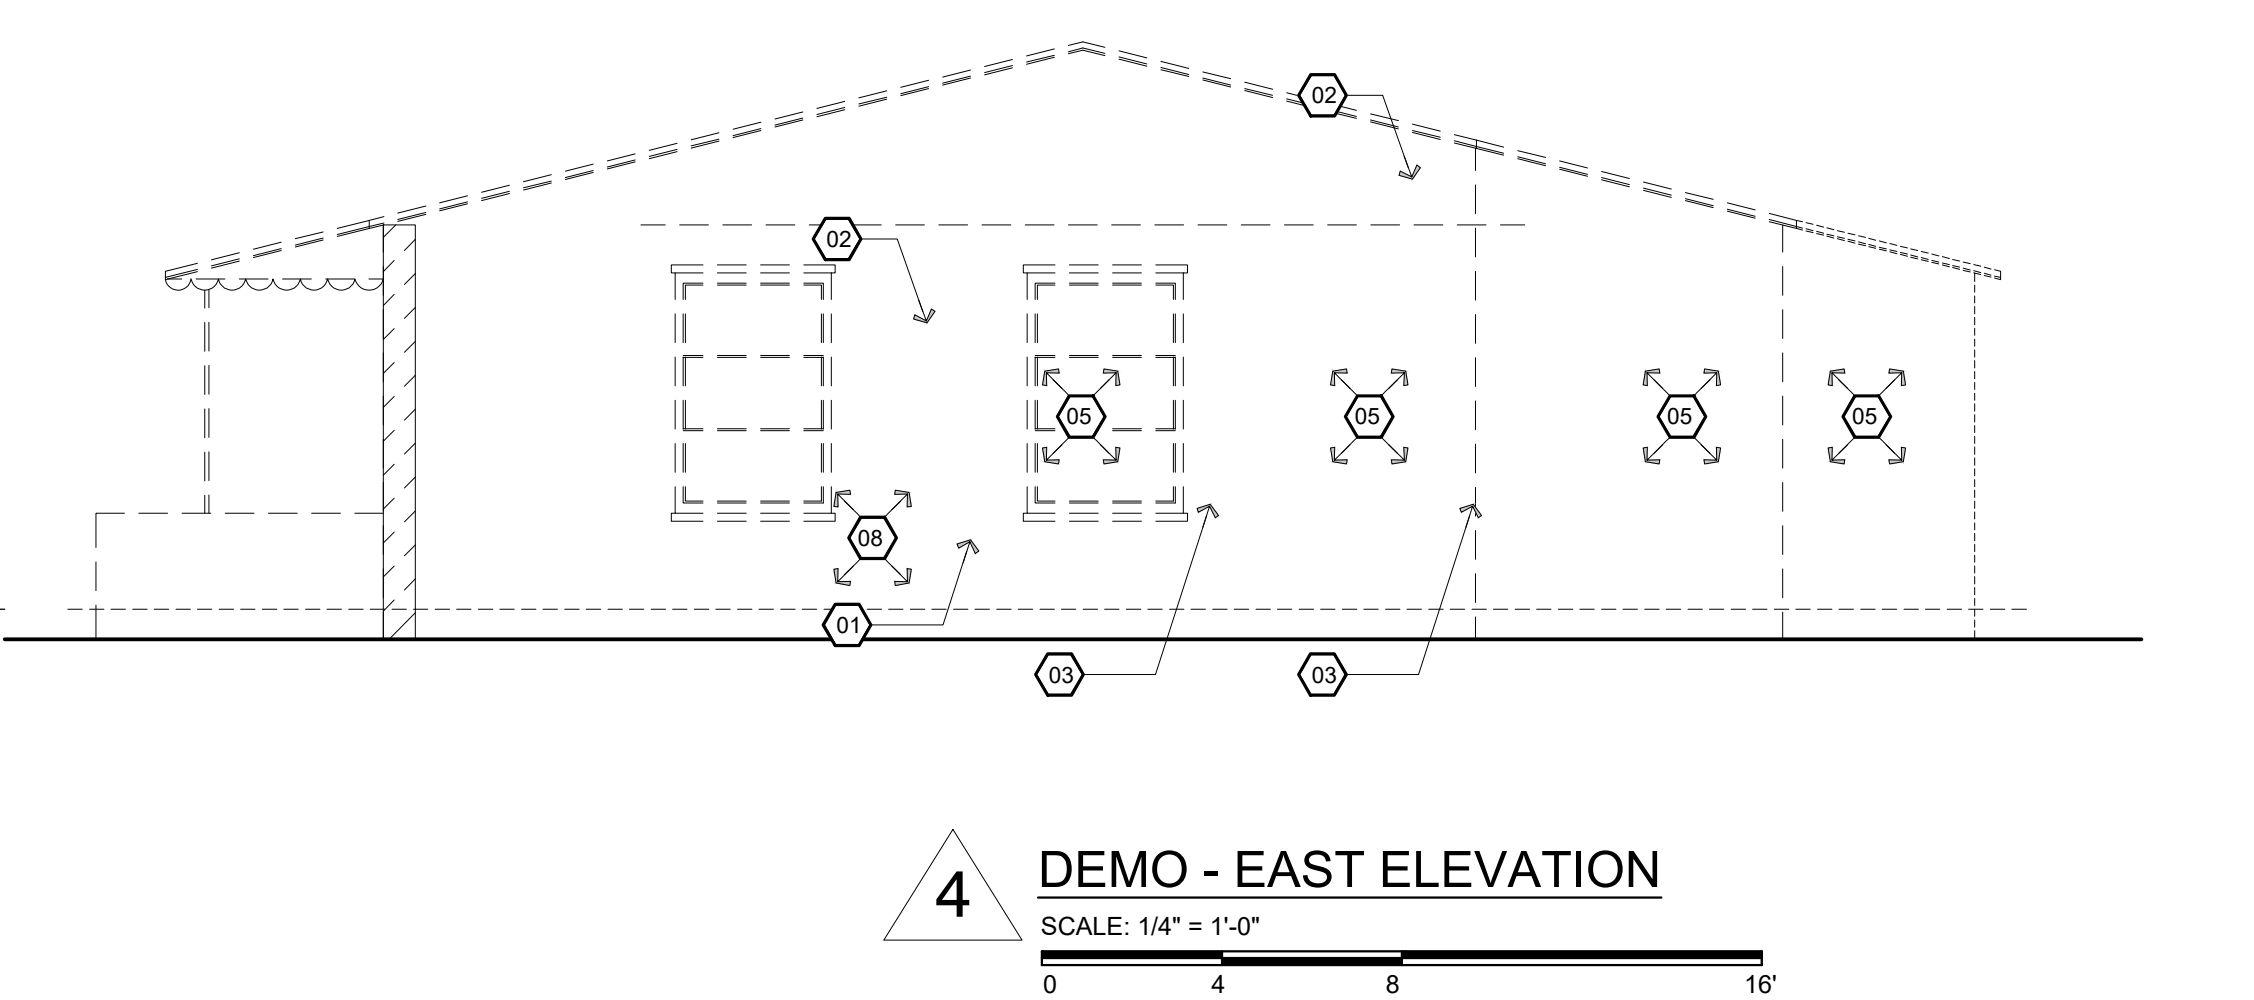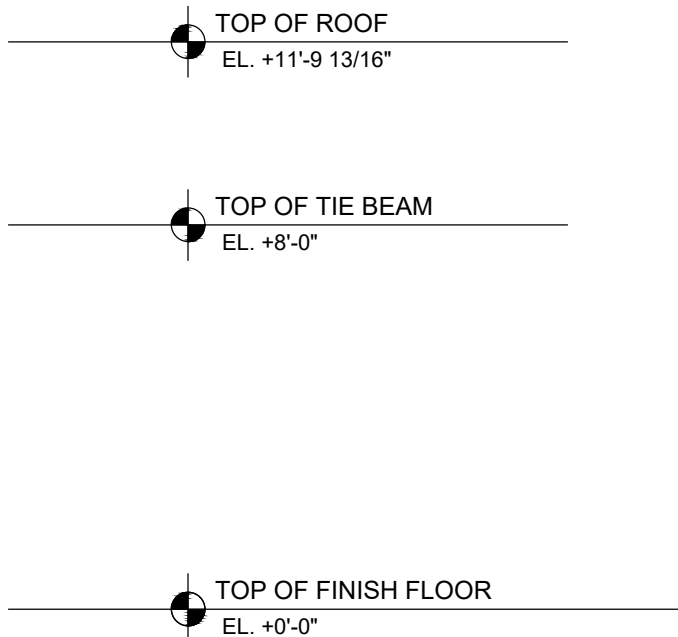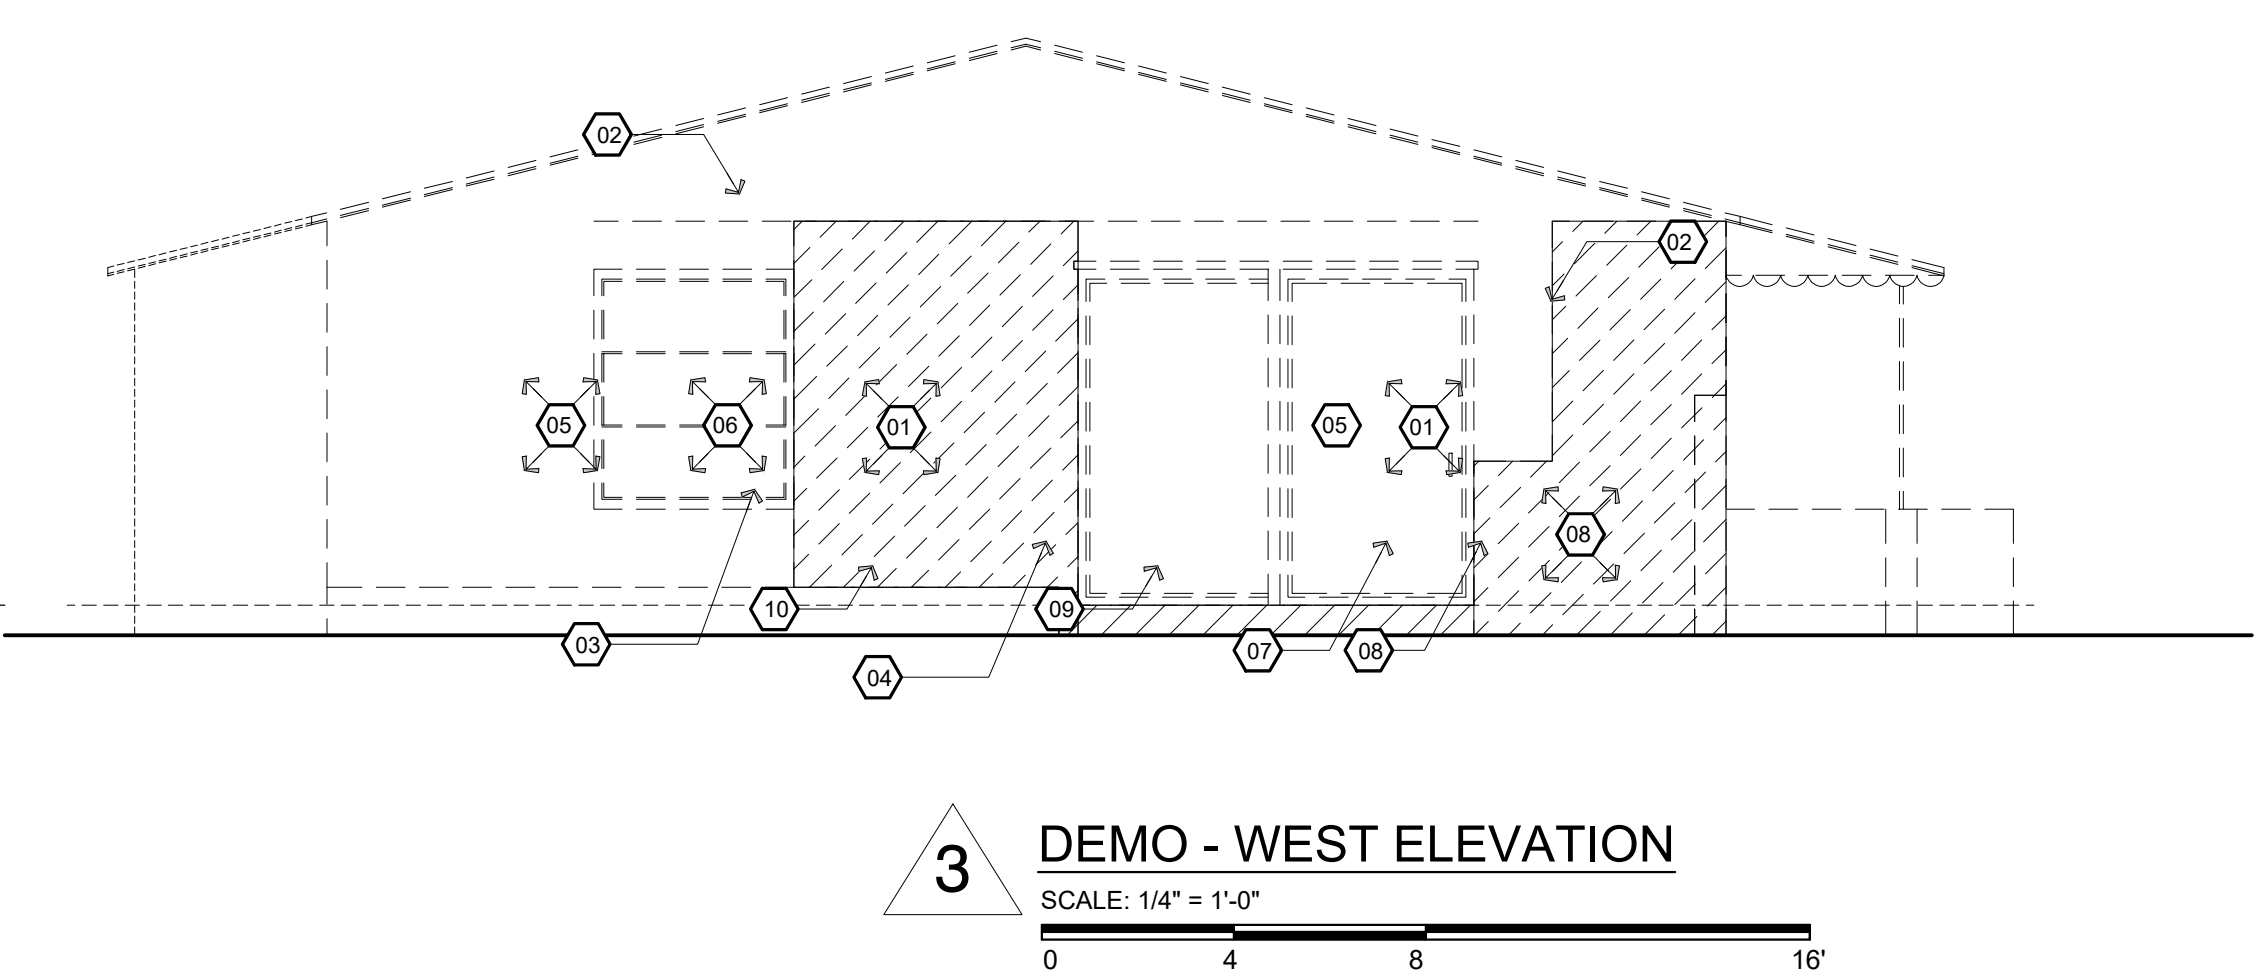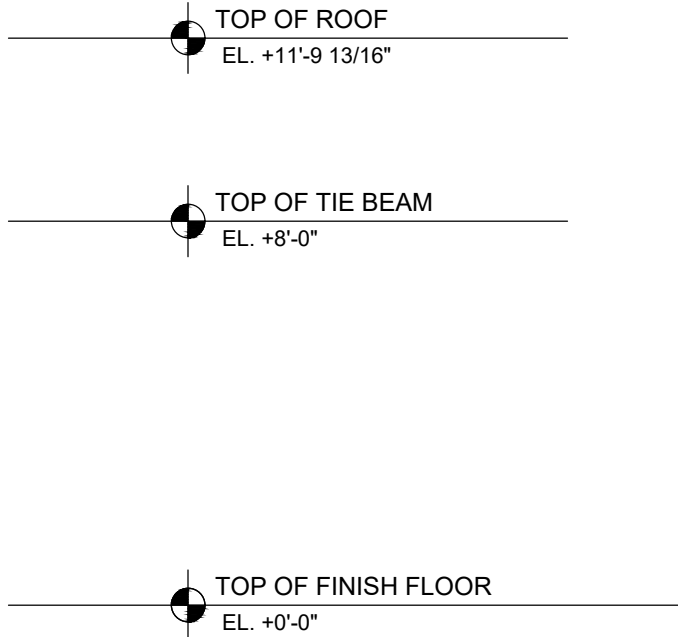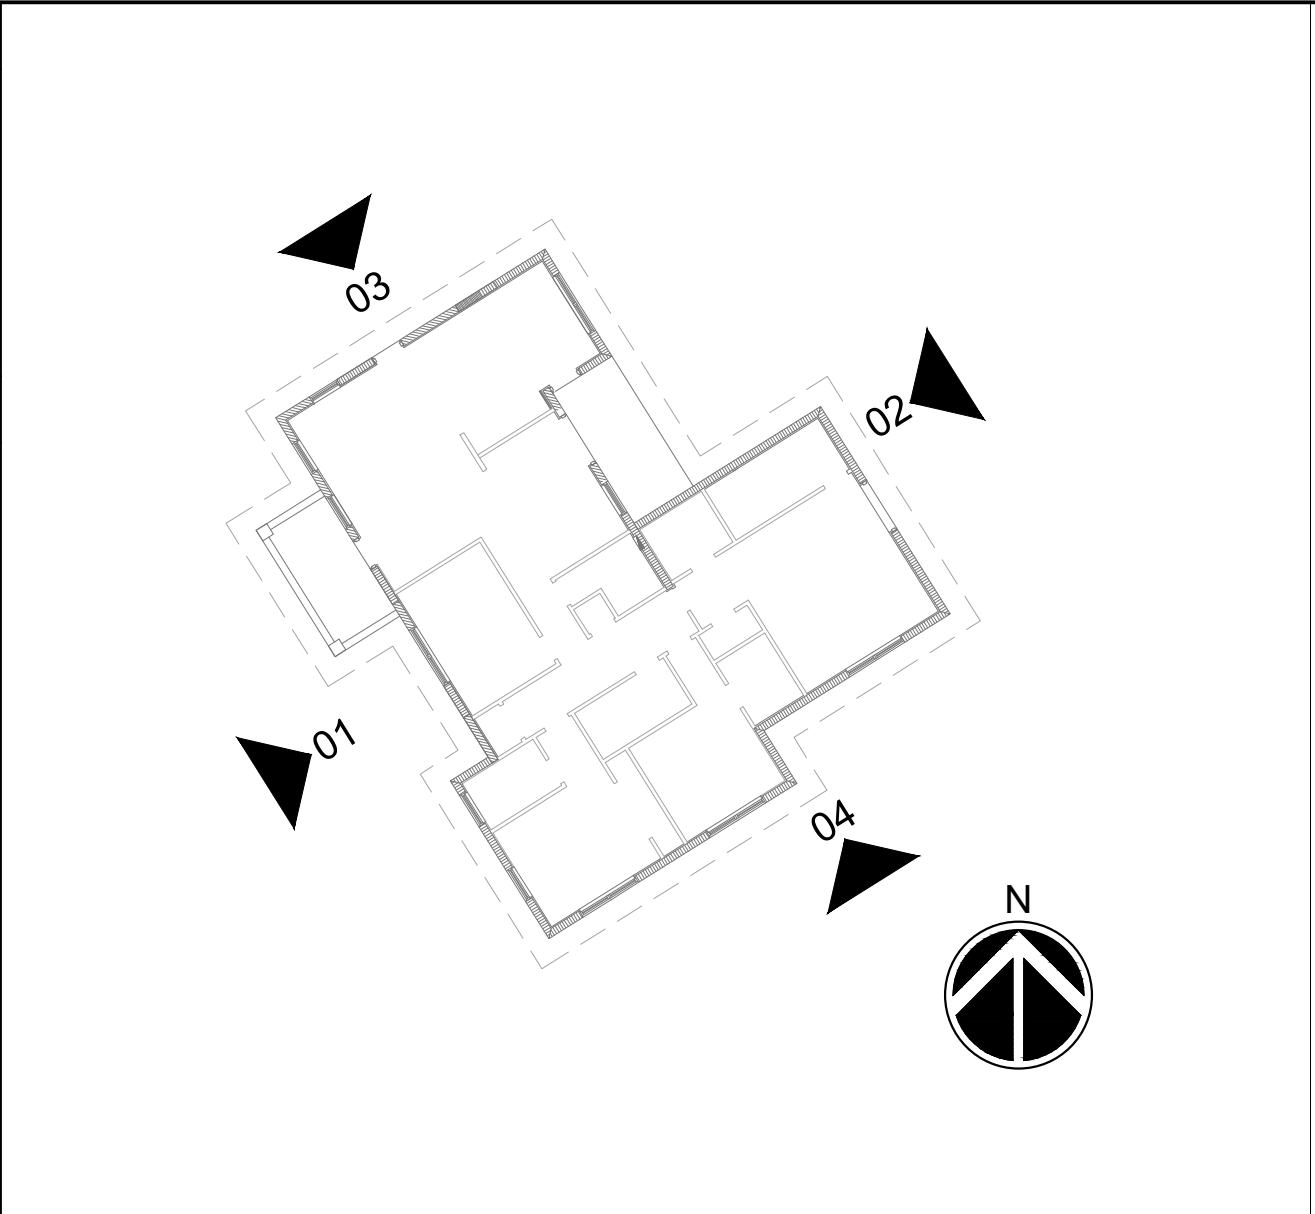

1701 PONCE DE LEON | SUITE 201
CORAL GABLES, FLORIDA 33134
o - 305.284.7325
e - ra@realizationarchitects.com
w - www.realizationarchitects.com

CLIENT / PROJECT:

JUAN ROSELLO
5125 SW 98 CT
MIAMI, FL 33165

CONSULTANTS:

ATRIUM
CONSULTING ENGINEERS
390 W 33RD ST.
HIALEAH, FL 33012
ATRIUM.INFO@ATRIUMENGINEERS.COM
786.991.7299

REVISIONS

DATE: 03.16.23

DRAWINGS AND SPECIFICATIONS AS INSTRUMENTS OF PROFESSIONAL SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF REALIZATION ARCHITECTS LLC. THESE DOCUMENTS ARE NOT TO BE USED, IN WHOLE OR IN PART, FOR ANY OTHER PROJECTS OR PURPOSES, OR BY ANY OTHER PARTIES, THAN THOSE PROPERLY AUTHORIZED BY CONTRACT, WITHOUT THE SPECIFIC WRITTEN AUTHORIZATION OF REALIZATION ARCHITECTS LLC.

RAFAEL TAPANES AR 97896

DISCIPLINE / SHEET TITLE:

DEMOLITION ELEVATIONS

SCALE: AS SHOWN

SHEET NO:

D-201